




DRIVE APRON DETAIL
TREE LAWN GREATER THAN 6'-0"

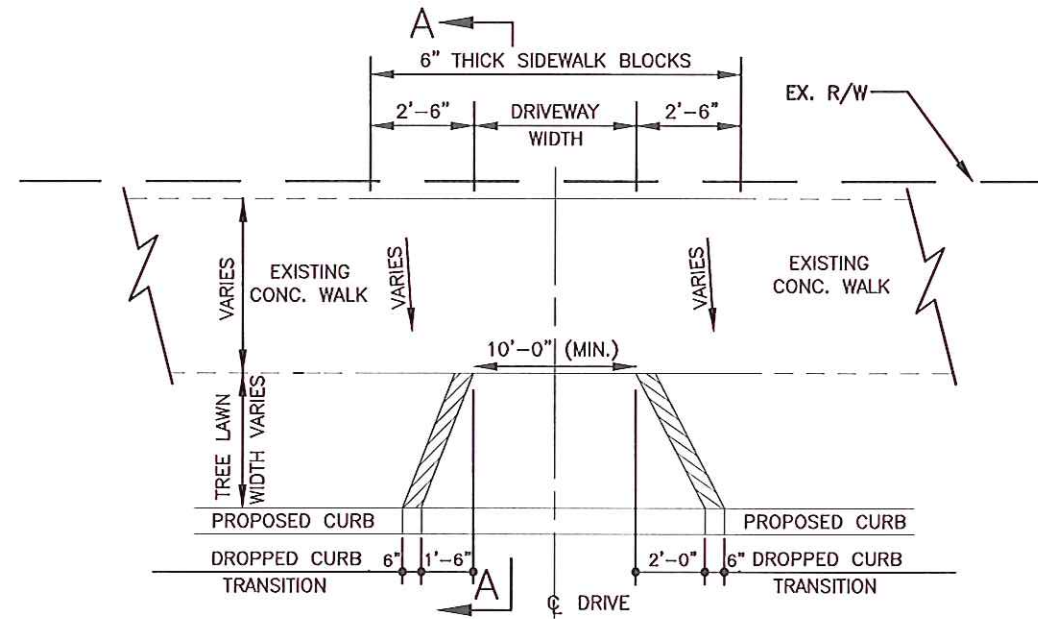

DRIVE APRON DETAIL
TREE LAWN LESS THAN 6'-0"

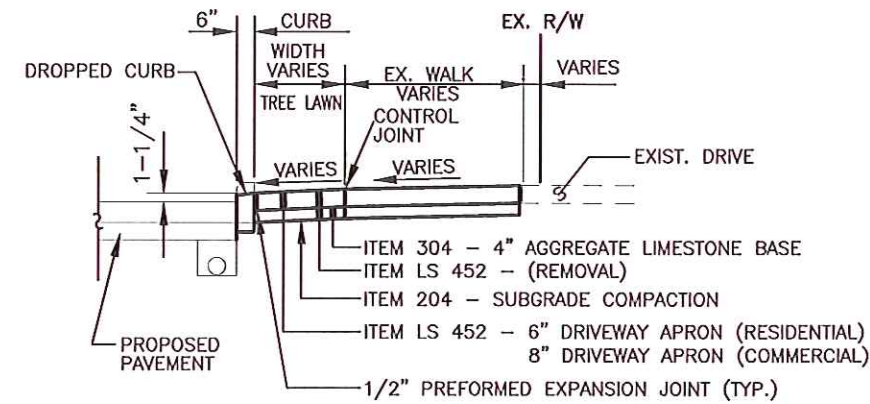

SECTION A-A

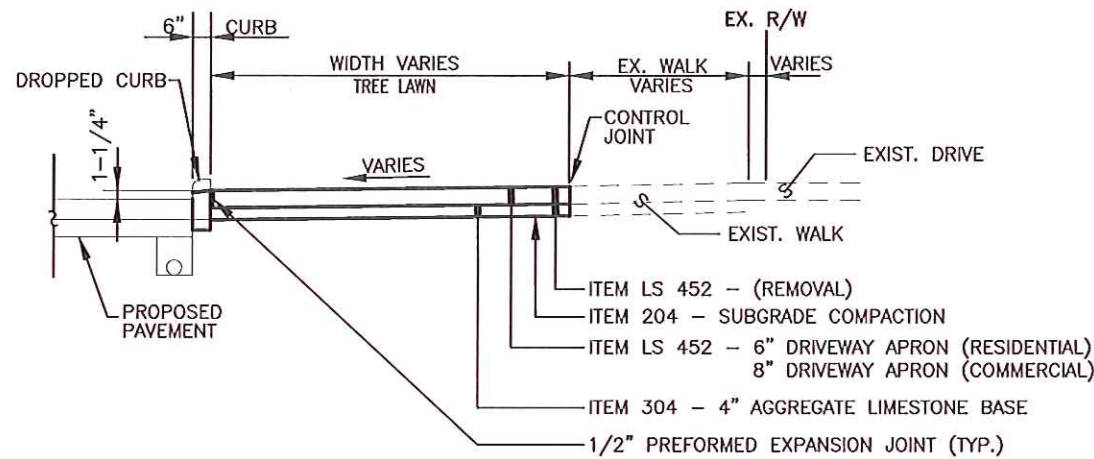

SECTION A-A

NEW DRIVEWAY APRON DETAIL

SCALE: NONE

NOTES:

1. DRIVE APRONS DISTURBED BY CONSTRUCTION SHALL BE REPLACED WITH ITEM LS 452 - FIBER REINFORCED CONCRETE PAVEMENT. PAYMENT SHALL INCLUDE ALL EXCAVATION AND DISPOSAL OF EXISTING APRONS AND SUBBASE STONE.
2. APRONS SHALL BE INSTALLED WITH MAXIMUM GRADE OF 12% SAG BREAK AND 8% CREST BREAK.
3. APRON PAVING SHALL INCLUDE ALL CURB ASSOCIATED WITH APRON CONSTRUCTION.